

PCT




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification 6:</b> <b>H04N 5/44, 7/01</b>	<b>A2</b>	<b>(11) International Publication Number:</b> <b>WO 96/27981</b> <b>(43) International Publication Date:</b> 12 September 1996 (12.09.96)
<b>(21) International Application Number:</b> PCT/IB96/00147 <b>(22) International Filing Date:</b> 26 February 1996 (26.02.96) <b>(30) Priority Data:</b> 9504307.1                      3 March 1995 (03.03.95)                      GB <b>(71) Applicant:</b> PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL). <b>(71) Applicant (for SE only):</b> PHILIPS NORDEN AB [SE/SE]; Kottbygatan 5, Kista, S-164 85 Stockholm (SE). <b>(72) Inventors:</b> ANDREW, Derek; Little Greenings, Beggarhouse Lane, Charlwood, Surrey RH6 0ER (GB). FAGG, Ian, Sydney; 23 Lechford Road, Horley, Surrey RH6 7NB (GB). <b>(74) Agent:</b> WHITE, Andrew, Gordon; Internationaal Octrooibureau B.V., P.O. Box 220, NL-5600 AE Eindhoven (NL).		<b>(81) Designated States:</b> BR, CN, JP, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). <b>Published</b> <i>Without international search report and to be republished upon receipt of that report.</i>

**(54) Title:** VIDEO IMAGE PROCESSING**(57) Abstract**

A method and apparatus are provided for video signal processing of sequences of digitised images originating from video (10) or film. A field grabber (12) receives the digitised images from the input and identifies the separate fields thereof. An image manipulation stage (14) combines fields as required and reduces the number of pixels per line and pixel lines in each image by applying horizontal and vertical compression; this stage also provides filtering and resizing of the image as required. Following encoding (16) of the compressed images, the encoded data stream may then be processed (18) into a form for recording onto, for example, an optical disc. By appropriate choice of the number of lines to which the image manipulation stage (14) reduces the image, discs playable on either PAL or NTSC standard equipment may be produced from a single image source.

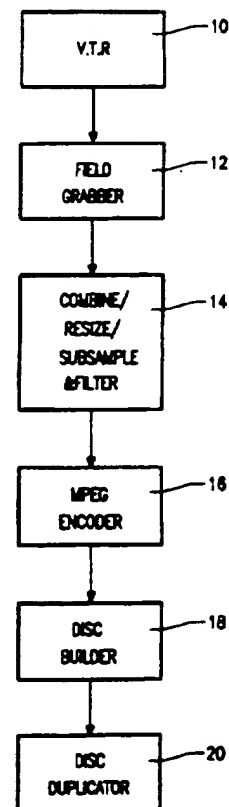

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

## DESCRIPTION

## VIDEO IMAGE PROCESSING

5           The present invention relates to methods of processing video signals and particularly, but not exclusively, to the processing of material originating from either 625 line 50Hz video or film camera in order to produce recorded media such as compact discs in different formats which can be played and displayed on either PAL or NTSC television equipment.

10           An example of a processing system for obtaining video images from stock using both high- and standard-definition telecine apparatus is given in European Patent Application EP-A-0595323 (Fujinami et al/Sony). The high-definition telecine is used to enable the production of a video signal with  
15           increased vertical resolution such as to be capable of display on a progressive scanning display. By a further process reducing the number of pixels, a standard-definition progressive scan signal is produced from which a standard-definition interlaced signal is generated.

          A principal use for such systems is in the production of NTSC standard  
20           videos, optical discs, or other recorded media. According to conventional techniques, this requires a standards conversion process to produce a 525 line NTSC video tape from which the discs can be prepared. The cost of preparing the standards converted tape is typically in the region of US\$15,000 for the material for one complete disc. One use for the system  
25           outlined above is in the conversion of music videos (which are often produced on film) to compact disc (CD) standards.

          The problems of the differing requirements of the PAL and NTSC systems have long been recognised. Attempts to overcome them have included display systems with in-built standards conversion facilities as  
30           described in, for example, EP-A-0639029 (Lee/Goldstar) and US 5,280,351 (Wilkinson/Sony UK). Such options are presently unattractive, however, due

to the high increased cost of the sets, which cost must be borne by the customer.

It is an object of the present invention to avoid the necessity of preparing an NTSC master when generating video from film source by the provision of a system operable to simultaneously produce, inter alia, two sets of images suitable for recording according to the Video Compact Disc standard (also known as the White Book standard), where one set is to be played on an NTSC standard player and the other on a PAL standard player.

It is a further object of the present invention to provide a system where the two sets of images may be obtained in a single pass through the original (master) image sequence.

In accordance with the present invention there is provided video signal processing apparatus having an input for receiving a sequence of digitised images from an image source, said apparatus comprising: field grabber means coupled to receive digitised images from the input, and operable to identify separate fields thereof and output an image frame as lines of pixel data; image manipulation means operable to apply horizontal and vertical compression to reduce the number of pixels per line and pixel lines in each image frame output by the field grabber, to numbers determined by a preselected display format; video encoding means arranged to receive the compressed image frames from the image manipulation means and encode them according to a predetermined coding standard.

Where the image source supplies an interlaced video signal, the field grabber means is preferably operable to grab both fields with the image manipulation means being operable to perform field combination with sub-sampling to produce the compressed image frames at substantially half the video signal field rate. In such circumstances, the image manipulation means is preferably operable to applying filtering when performing the field combination such as to reduce aliasing and to compensate for motion effects in the image fields. The image manipulation means may be further operable

to perform image resizing by horizontal expansion of images: this resizing may alternatively, or additionally, be carried out by selection of a part of the image at the encoding stage.

Where the image source supplies images from film (i.e. the image source comprises telecine apparatus), the pairs of compressed image frames are again combined and the output is suitably produced at or close to the display frame rate of the film.

Also in accordance with the present invention there is provided a method of processing sequences of digitised images received from an image source, said method comprising the steps of:

grabbing the digitised images, identifying separate fields thereof and outputting an image frame as lines of pixel data;

reducing the number of pixels per line and pixel lines in each image frame to numbers determined by a preselected display format, by respectively applying horizontal and vertical compression; and

encoding the compressed image frames according to a predetermined coding standard.

The predetermined coding standard may suitably be the MPEG1 or 2 standard, with the preselected display format being either NTSC or PAL standard.

Further in accordance with the present invention, there is provided a record carrier preferably, but not essentially, an optical disc, carrying encoded video images produced by the signal processing apparatus or method described above. Where the record carrier is an optical disc, the said predetermined recording format suitably complies with either the Compact Disc Interactive standard or the Video Compact Disc standard.

As will be understood, the above-described processes can be implemented either as a dedicated function or as options in equipment which performs grabbing, picture re-sizing and, where required, sub-sampling with appropriate filters. When operating in accordance with the present invention, the equipment can produce output intended for either PAL or NTSC display

from the same source tape.

Preferred embodiments of the present invention will now be described by way of example only and with reference to the accompanying drawing (Figure 1) which is a block schematic diagram of a data processing system embodying the present invention.

The processing of material originating from video for a disc intended for NTSC display includes the application of vertical squeezing to the picture to reduce the 625 line source to a near full screen image of 240 lines (which will be expanded in the player, typically by repetition of lines, to give 480 lines) with a resolution of 352 pixels per line. This squeezing can be applied by external digital effects video equipment or built into the grabber as part of the sub-sampling and filtering process. The picture sequence is then encoded as a near full screen 352 pixel by 240 line picture in accordance with the MPEG1 or 2 standard and at a picture rate of 25Hz. Advantage is then taken of the decoder frame store in a player to convert the display rate from 25 to 30Hz to provide an NTSC output.

For material originating from film, the picture sequence in the 625 line original may be the original 24 frame per second film speeded up to 25Hz. The process allows the MPEG encoded data stream to be time stamped at either 24 or 25 frame per second rate so that the rate may be slowed if desired. The audio must be treated appropriately to maintain synchronisation.

Figure 1 is a block diagram of the apparatus in the processing chain, starting with video player 10 playing the master video tape (although it will be readily understood that this could be telecine apparatus providing images from frames of film). Whilst not shown, it will also be understood how the audio is treated although where special considerations apply, these are discussed below. Field grabber 12 separates the various fields of the video for analysis, for example to check for correct maintenance of the field

dominance, and also to detect seam breaks due to editing, to avoid the combination of fields from different original images (such as from either side of a break) which would otherwise lead to blurred pictures. The separated fields are then passed to a frame processing unit 14 which handles combining, re-sizing, sub-sampling and filtering as required. If the master is film, this unit samples and filters as necessary to provide the fields for interlacing: if the master is video, different filtering will be required in order to compensate for motion effects. As to re-sizing, at least some will be carried out by this stage, although some may also be carried out externally, for example by window selection in the subsequent stage, MPEG encoder 16. The sub-sampling carried out at stage 14 reduces the picture to half size for coding in MPEG.

Following the conventional MPEG encoder 16, the disc builder 18 arranges the data according to the rules specified for the particular disc format chosen (for example the sector layout, audio handling and so forth) which data is then used for the production of discs by duplicator 20.

Considering now the differences between the Compact Disc Interactive and Video Compact Disc standards, generally known and referred to hereinafter as Green Book and White Book standards respectively, for video the differences include the fact that, in Green Book, with pictures encoded as blocks of 16 x 16 pixels, there is a limit on the number of blocks per frame. This is set at 396 blocks in constrained MPEG at 25Hz and 330 blocks at 30Hz. For 25Hz this allows near full screen sizes of

$$\begin{aligned} 352 \times 288 &= 22 \times 18 = 396 \text{ blocks} \\ 384 \times 256 &= 24 \times 16 = 384 \text{ blocks} \\ 368 \times 272 &= 23 \times 17 = 391 \text{ blocks.} \end{aligned}$$

In contrast, for White Book standard there are fixed picture sizes specified; 352 x 288 pixels for PAL at 25Hz and 352 x 240 pixels at 24 and 30Hz. A White Book PAL disc can be played on an NTSC display, although 48 lines are omitted to get the 240 specified with the cut generally (but not always) being 24 lines from each of the top and bottom. In such

circumstances, these 48 redundant lines may simply be coded black, giving a "Cinemascope" appearance to the images when played on a PAL display.

The system provides temporal accuracy of image sequences throughout such that re-combination of video with audio is very straightforward. Unless there is a 24 to 25Hz increase in speed, the audio requires no treatment. If treatment of the audio is required, however, it is precisely predictable. The differing effects of the Green Book and White Book standards on the audio are as follows. The audio bit rate for Green Book is variable but for White Book is fixed at 224 k/bits per second - that is to say for a fixed duration sequence in White Book, a fixed number of audio bits are specified. Accordingly, if time stamps are added at 24Hz and it is desired to display at 25Hz, it is necessary to re-code the audio to get the correct bit rate. Time stamping at 25Hz, however, means that the whole sequence is speeded up (including audio) but no separate re-coding of the audio is required.

For White Book the audio rate is fixed at 224 k/bits per second with the video rate at 1.15 m/bits per second. For Green Book audio, there is no bit rate restriction as such, but the combined audio and video is constrained by the maximum rate that the data can be delivered from disc. Typical Green Book rates to satisfy this are audio at 192 k/bits per second with video at 1.186 m/bits per second.

A particular problem is with aspect ratio distortions for differing standards. A circle appearing on screen will appear squashed when displayed in White Book if Green Book standard is set, and squeezed in Green Book if White Book is set. A quoted figure is 11% required horizontal correction to be applied for Green Book standard (this is not generally a problem in White Book where the frequency corresponds to the VTR clock). Starting from the CCIR601 D1 clock VTR image, if we wish to grab for NTSC or PAL according to the White Book standard, we must cope with display rate and picture size changes. For Green Book standard, we also have to cope with aspect ratio changes.



In general we are looking to code White Book pictures with a fixed picture size for PAL at 25Hz and NTSC at 24 or 25Hz (generally 25Hz will be used for both), which gives the possibility of a 352 x 288 25Hz picture. In terms of data rates, this is acceptable for both. For picture size, this is acceptable for PAL but NTSC is dealt with as 240 lines plus 24 lines black above and below. This can then be displayed at 25Hz using White Book picture conversion mechanisms or we can extract the central 240 lines and code as 24 or 25Hz NTSC (this split is possible in the encoder which allows us to take a window from whatever input, that is to say ignoring the black).

The process of correction is split into parts through the stages shown in Figure 1 and requires an initial determination as to whether the produced disc is to be White Book or Green Book standard.

The 11% stretch theoretically required for Green Book (as we are normally aiming at White Book) is produced as a 6% actual horizontal stretch together with a 4% vertical squeeze. The 11% figure is derived from the ratio of 15 to 13.5 MHz pixel clock rates and the 6% figure is derived from the ratio of 384 to 360 pixels, that is to say the ratio of the maximum permissible Green Book image width to full width (i.e. half the original 720 pixel width of the CCIR601 image) at desired image rates. The ratios allow expansion to maximise the picture area without losing detail from the edges.

The process for a disc intended for PAL display involves grabbing both fields of the input video and performing field combination with sub-sampling to reduce the data to typically 288 lines with a resolution of 352 pixels per line. In the case of Green Book format, the image is stretched in the horizontal direction to achieve correct aspect ratio in the final displayed image. The data is then encoded using a conventional MPEG 1 or 2 encoding scheme.

In the case where a 525 line NTSC master exists, rather than trying to get directly to PAL from NTSC, an original film frame would be re-created from the NTSC video by reversing the 3:2 pull down. The original film frame gives successive frames (in video) derived from the same instant, that is to

say sharper images without motion effects. In general it is preferred to start from film (i.e 24 frame per second sequence) but regeneration from NTSC can be done if the original film stock has become lost or damaged. The recreation involves various weighting techniques to get the 24 frames from 30Hz video but this is beyond the scope of the present invention.

From the foregoing it will be seen that we have described a process that converts PAL standard 50Hz video, or film, to a format which is suitable for encoding in Green Book or White Book digital video, such as to allow simultaneous production of two output data files, one of which can be coded to produce a disc which plays on an NTSC player and the other a disc which plays on a PAL player. The process can satisfy the relevant restrictions implied by the White Book, Green Book and MPEG 1 or 2 standards and utilises the facilities in existing players to produce the desired output images without image distortion.

From reading the present disclosure, other modifications will be apparent to persons skilled in the art. Such modifications may involve other features which are already known in the design, manufacture and use of audio/visual standards conversion equipment and component parts thereof and which may be used instead of or in addition to features already described herein. Although claims have been formulated in this application to particular combinations of features, it should be understood that the scope of the disclosure of the present invention also includes any novel feature or any novel combination of features disclosed herein either explicitly or implicitly or any generalisation thereof, whether or not it relates to the same invention as presently claimed in any claim and whether or not it mitigates any or all of the same technical problems as does the present invention. The applicants hereby give notice that new claims may be formulated to such features and/or combinations of features during the prosecution of the present application or of any further application derived therefrom.

## CLAIMS

1. Video signal processing apparatus having an input for receiving a sequence of digitised images from an image source, said apparatus  
5 comprising:

field grabber means coupled to receive digitised images from the input, and operable to identify separate fields thereof and output an image frame as lines of pixel data;

image manipulation means operable to apply horizontal and vertical  
10 compression to reduce the number of pixels per line and pixel lines in each image frame output by the field grabber, to numbers determined by a preselected display format;

video encoding means arranged to receive the compressed image frames from the image manipulation means and encode them according to a  
15 predetermined coding standard.

2. Apparatus as claimed in Claim 1, wherein said image manipulation means are further operable to expand the image in the horizontal direction by interpolation of pixel values.

20

3. Apparatus as claimed in Claim 1, in which, where the image source supplies an interlaced video signal, the field grabber means is operable to grab both fields and the image manipulation means is operable to perform field combination with sub-sampling to produce said compressed image  
25 frames at substantially half the video signal field rate.

4. Apparatus as claimed in Claim 3, in which the image manipulation means is further operable to applying filtering when performing field combination such as to compensate for motion effects in the image  
30 fields.

5. Apparatus as claimed in Claim 1, in which, where the image source comprises telecine apparatus supplying pairs of images from successive film frames, the field grabber means is operable to grab both fields and the image manipulation means is operable to perform field combination to produce said compressed image frames at or close to the display frame rate of said film.

6. Apparatus as claimed in any preceding Claim, wherein said video encoding means is operable to select for encoding a part of each received compressed image frame.

7. Apparatus as claimed in any preceding Claim, wherein said predetermined coding standard is the MPEG1 or MPEG2 standard.

8. Apparatus as claimed in any preceding Claim, further comprising disc building means connected to receive said encoded frames from the video encoding means and to arrange the data according to a predetermined recording format for recording onto optical disc.

9. Apparatus as claimed in Claim 8, wherein said predetermined recording format complies with the Video Compact Disc standard.

10. Apparatus as claimed in Claim 8, wherein said predetermined recording format complies with the Compact Disc Interactive standard.

11. A method of processing sequences of digitised images received from an image source, said method comprising the steps of:

grabbing the digitised images, identifying separate fields thereof and outputting an image frame as lines of pixel data;

reducing the number of pixels per line and pixel lines in each image frame to numbers determined by a preselected display format, by respectively

applying horizontal and vertical compression; and  
encoding the compressed image frames according to a predetermined  
coding standard.


5           12. A method as claimed in Claim 11, wherein the preselected  
display format is NTSC standard and the compression reduces the image  
frame to 240 lines.

10           13. A method as claimed in Claim 11, wherein the preselected  
display format is PAL standard and the compression reduces the image frame  
to 288 lines.

15           14. An optical disc carrying encoded video images output from the  
video encoding means of the signal processing apparatus claimed in any of  
Claims 1 to 10.

          15. A data carrier carrying a sequence of video images encoded by  
a method of processing as claimed in any of Claims 11 to 13.

1/1

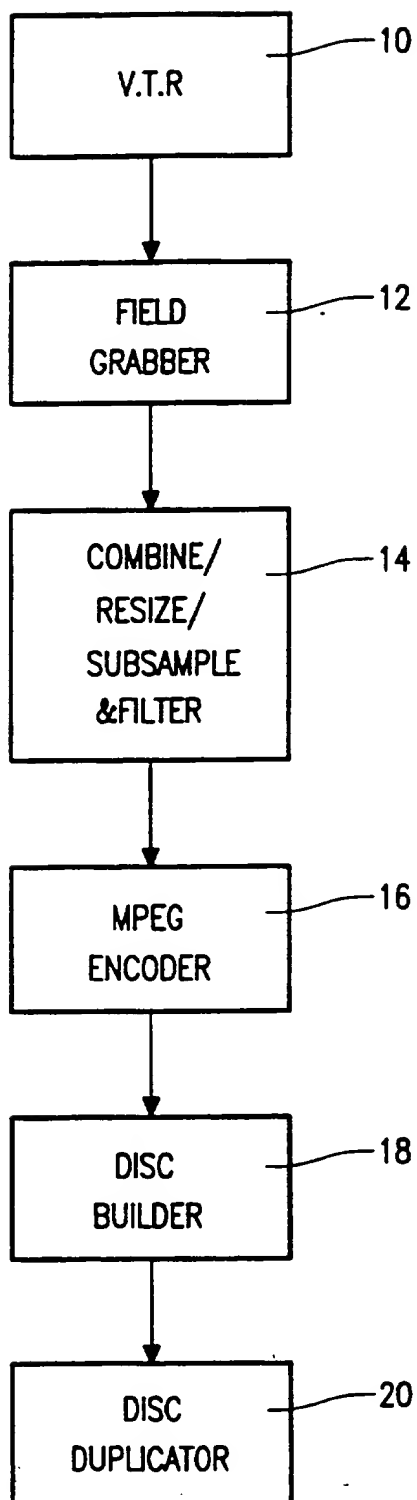

**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>H04N 5/926, 7/01, 7/26</b>		<b>A3</b>	(11) International Publication Number: <b>WO 96/27981</b>
			(43) International Publication Date: 12 September 1996 (12.09.96)
(21) International Application Number: PCT/IB96/00147			<b>(81) Designated States:</b> BR, CN, JP, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).  <b>Published</b> <i>With international search report.</i> <i>Before the expiration of the time limits for amending the claims and to be republished in the event of the receipt of amendments.</i>  <b>(88) Date of publication of the international search report:</b> 31 October 1996 (31.10.96)
(22) International Filing Date: 26 February 1996 (26.02.96)			
(30) Priority Data: 9504307.1 3 March 1995 (03.03.95) GB			
(71) Applicant: PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).			
(71) Applicant (for SE only): PHILIPS NORDEN AB [SE/SE]; Kottbygatan 5, Kista, S-164 85 Stockholm (SE).			
(72) Inventors: ANDREW, Derek; Little Greenings, Beggarhouse Lane, Charlwood, Surrey RH6 0ER (GB). FAGG, Ian, Sydney; 23 Lechford Road, Horley, Surrey RH6 7NB (GB).			
(74) Agent: WHITE, Andrew, Gordon; Internationaal Octrooibureau B.V., P.O. Box 220, NL-5600 AE Eindhoven (NL).			
<b>(54) Title: VIDEO IMAGE PROCESSING</b>			
<b>(57) Abstract</b> <p>A method and apparatus are provided for video signal processing of sequences of digitised images originating from video (10) or film. A field grabber (12) receives the digitised images from the input and identifies the separate fields thereof. An image manipulation stage (14) combines fields as required and reduces the number of pixels per line and pixel lines in each image by applying horizontal and vertical compression; this stage also provides filtering and resizing of the image as required. Following encoding (16) of the compressed images, the encoded data stream may then be processed (18) into a form for recording onto, for example, an optical disc. By appropriate choice of the number of lines to which the image manipulation stage (14) reduces the image, discs playable on either PAL or NTSC standard equipment may be produced from a single image source.</p>			
<pre>graph TD; 10[V.T.R] --&gt; 12[FIELD GRABBER]; 12 --&gt; 14[COMBINE/ RESIZE/ SUBSAMPLE &amp; FILTER]; 14 --&gt; 16[MPEG ENCODER]; 16 --&gt; 18[DISC BUILDER]; 18 --&gt; 20[DISC DUPLICATOR];</pre>			

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam



# INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB 96/00147

## A. CLASSIFICATION OF SUBJECT MATTER

IPC6: H04N 5/926, H04N 7/01, H04N 7/26

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0595323 A2 (SONY CORPORATION), 4 May 1994 (04.05.94), see the claims	1,3-5,7-15
Y	--	2,6
Y	US 5243433 A (KEITH, R. HAILEY), 7 Sept 1993 (07.09.93), figure 2, abstract	2,6
A,P	EP 0685968 A2 (VICTOR COMPANY OF JAPAN, LIMITED), 6 December 1995 (06.12.95), column 4, line 56 - column 5, line 4, abstract	1-15
	--	

☒ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

\* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

25 Sept 1996

Name and mailing address of the ISA/  
Swedish Patent Office  
Box 5055, S-102 42 STOCKHOLM  
Facsimile No. +46 8 666 02 86

Date of mailing of the international search report

27-09-1996

Authorized officer

Bengt Jonsson  
Telephone No. +46 8 782 25 00

# INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB 96/00147

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0514012 A2 (VISTEK ELECTRONICS LIMITED), 19 November 1992 (19.11.92), page 5, line 46 - line 52, figure 5, see the claims --	1-15
A	EP 0428073 A2 (PACIFIC VIDEO, INC.), 22 May 1991 (22.05.91), page 7, line 46 - line 50, figure 6, abstract --	1-15
A	EP 0508342 A1 (DEUTSCHE THOMSON-BRANDT GMBH), 14 October 1992 (14.10.92), abstract --	4
A	GB 2272816 A (SONY UNITED KINGDOM LIMITED), 25 May 1994 (25.05.94), abstract, see the claims -----	1-15

**INTERNATIONAL SEARCH REPORT**

Information on patent family members

International application No.

05/09/96

PCT/IB 96/00147

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A2- 0595323	04/05/94	AU-A- 5032293 JP-A- 6153069 US-A- 5485280 US-A- 5510902	12/05/94 31/05/94 16/01/96 23/04/96
US-A- 5243433	07/09/93	EP-A- 0579795 JP-T- 6505853 WO-A- 9314592	26/01/94 30/06/94 22/07/93
EP-A2- 0685968	06/12/95	JP-A- 7327164 US-A- 5517248	12/12/95 14/05/96
EP-A2- 0514012	19/11/92	US-A- 5428399	27/06/95
EP-A2- 0428073	22/05/91	CA-A- 2013575 JP-A- 3211978 US-A- 4998167 US-A- 5115311	14/05/91 17/09/91 05/03/91 19/05/92
EP-A1- 0508342	14/10/92	AU-B- 655460 AU-A- 1453592 CA-A- 2108254 CN-A- 1065767 DE-A- 4111980 EP-A- 0579651 JP-T- 6506574 NZ-A- 242306 TR-A- 25956 US-A- 5450133 WO-A- 9219071	22/12/94 17/11/92 13/10/92 28/10/92 15/10/92 26/01/94 21/07/94 27/04/94 01/11/93 12/09/95 29/10/92
GB-A- 2272816	25/05/94	JP-A- 7007713 US-A- 5446497	10/01/95 29/08/95

**THIS PAGE BLANK (USPTO)**

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ **BLACK BORDERS**

☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☒ **FADED TEXT OR DRAWING**

☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**

**THIS PAGE BLANK (USPTO)**